

# DIRECT THERMAL LABEL PRINTER

**DCCode**<sup>®</sup>

# DC 421D

## NEO




- USB + LAN Standard
- Fast print speed 152mm/s or 6 IPS
- Supporting TSPL, EPL, ZPL, DPL Commands
- Optional: Bluetooth, Wi-Fi



## 203 DPI

### Technical Specifications

<b>Resolution</b>	203 DPI
<b>Print method</b>	Direct Thermal
<b>Print speed</b>	152 mm (6") / s
<b>Max.print width</b>	108mm (4.09")
<b>Max.print length</b>	1778mm (70")
<b>Media</b>	
<b>Media type</b>	Continuous, gap, black mark, fan-fold and punched hole
<b>Media width</b>	25.4-115mm (1.0"-4.6")
<b>Media thickness</b>	0.06~0.254 mm (2.36~10mil)
<b>Media core diameter</b>	25.4 ~ 76.2 mm (1" ~ 3")
<b>Label length</b>	10 ~ 1778 mm(0.39" ~ 70")
<b>Performance Features</b>	
<b>Memory</b>	8MB Flash Memory/ 8MB SDRAM/ Flash memory upto Max.4GB
<b>Interface</b>	USB + LAN
<b>Processor</b>	32 Bit CPU
<b>1D Barcode</b>	Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN, etc.
<b>2D Barcode</b>	PDF-417, Maxicode, DataMatrix, QR code, Aztec
<b>Internal Fonts</b>	8 alpha-numeric bitmap fonts, Windows fonts can be downloaded
<b>Sensors</b>	Gap sensor & Moveable Black mark sensor
<b>Emulation</b>	TSPL ZPL, EPL, DPL
<b>Dimension</b>	217 mm (D) x 178 mm (W) x 158 mm (H)
<b>Weight</b>	1.2 kg
<b>Print Head Life</b>	25KM
<b>Driver</b>	Windows / Linux / Mac
<b>SDK</b>	Windows / iOS / Android
<b>Input</b>	AC 110-240V, 1.8A, 50-60Hz
<b>Output</b>	DC 24V, 2.5A, 60W
<b>Optionals</b>	Bluetooth, Wi-Fi, External Stand
<b>Operational Temp</b>	5° ~ 40°C(41~104°F) Humidity: 25 ~ 85% non-condensing

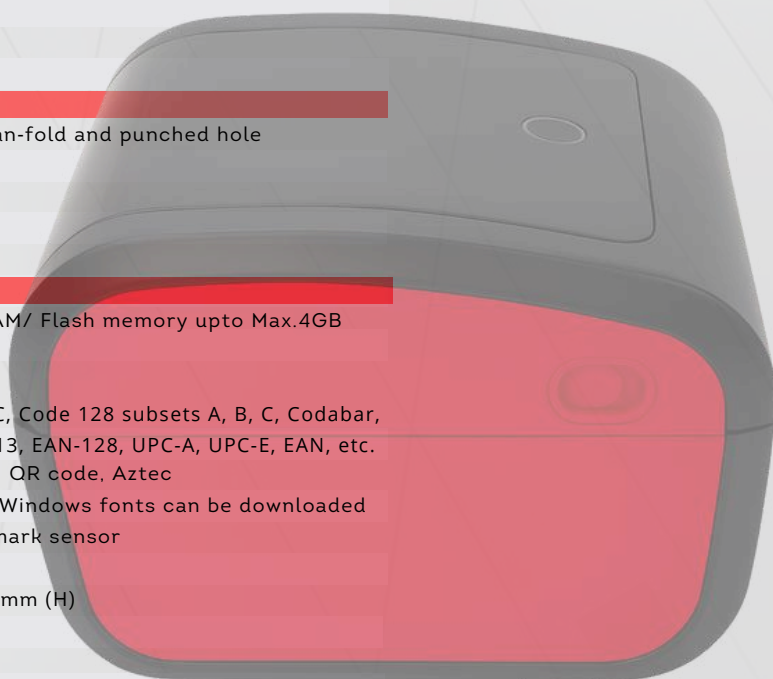

**DCCode**<sup>®</sup>

hello@dcodeinternational.in

www.dcodeinternational.in



DELHI NCR

MUMBAI

AHEMDABAD

SURAT

TIRUPUR

CHENNAI

LUDHIANA

PUNE

KOLKATA

COIMBATORE

GUWAHATI

Technical Support: +91 9999571649