

# 2D Cradle Wireless Barcode Scanner



## DC7122 CW




NEW ABS DESIGN, COMFORTABLE TO USE.



433MHZ WIRELESS + WIRED, UP TO 500M RANGE (INDOOR AND OUTDOOR DIFFER)



STORE UP TO 100,000 BARCODES.



ARM 32-BIT CORTEX.

## TECHNICAL SPECIFICATIONS

Scan Type	2D CMOS Area Imager (640×480 pixel)
Transmission Mode	433MHz Wireless + Wired
Transmission Distance	Indoor: Max 200m, Outdoor: Max 500m
Scan Speed	500 scans/sec
Resolution	4 mil
CPU	ARM 32-bit Cortex
Working Mode	Button Trigger, Continuous, Automatic
Bit Error Rate	1/5 million
Memory	100,000 barcodes
Scan Width	5 cm – 30 cm
Scan Distance	2 cm – 50 cm
Depth of Field	4mil to 20mil
Scan Angle	Rotation: ±30°, Inclination: ±55°, Declination: ±60°
Interface	USB / USB-COM
Working Voltage	5V
Maximum Current	130mA
Maximum Power	740mW
Decoding Capability	1D: UPC-A, UPC-E, Code128, EAN-13, EAN-8, ISBN, Code93, UCC/EAN-128, GS1 Code39, Code39 Full ASCII, Codabar, Interleaved 2 of 5, Databar, MSI, Code11, ISBN, ISSN, China post, etc. 2D: QR Code, PDF417, Data Matrix, Aztec, Maxicode, etc.
Certificate	CE, FCC, RoHS, IP54

### Mechanical Parameters


Dimensions	170 × 92 × 55 mm (without base)
Weight	176g (without base), 344g (with base)

### Environmental Parameters

Working Temperature	-20°C ~ 50°C
Storage Temperature	-40°C ~ 60°C
Humidity	0% ~ 95% (non-condensing)-
Drop Test	2m

### Warranty

24 Months against any manufacturing defect

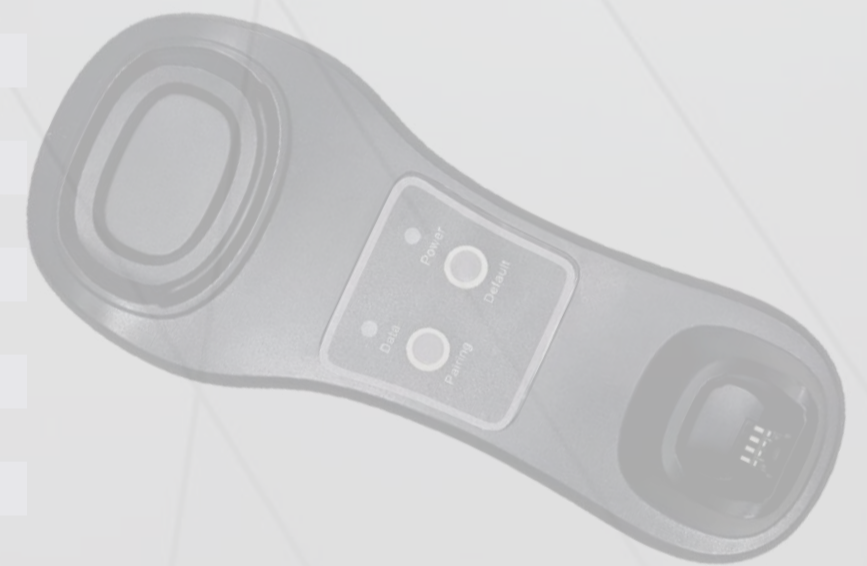

## APPLICATIONS



RETAIL



LOGISTICS



HOSPITAL



JEWELRY



WAREHOUSE



Technical Support: +91 9999571649



hello@dcodeinternational.in



www.dcodeinternational.in

